



INDUSTRIAL PANELS – PILOFOR® CLASSIC


- welded panels with square eyelets
- anchoring to posts with square profile (**CLASSIC, SUPER, SUPER STRONG**)
- panel width 2500 mm
- modified galvanized and galvanized + PVC

PILOFOR® PANELS WITH PROFILE

description	height (mm)	CLASSIC galvanized	CLASSIC galvanized + PVC	recommended post height	recommended number of anchorings to post	number of incorporated "V" shapes
eyelets 50 × 200 mm	630	✓	✓	1000	3	2
stamped profile	1030	✓	✓	1500	3	2
wire diameter 5 mm	1230	✓	✓	1700	4	2
	1530	✓	✓	2000	4	3
	1730	✓	✓	2200	5	3
	2030	✓	✓	2600	6	4
	2430	✓	✓	3200	7	4



- panels are terminated on one side with 30 mm barbs, and on the other side they are dull with horizontal wire
- panels can be installed with barbs upward or downward, as necessary
- installation with anti-burrowing boards
- quick installation
- highest quality
- we offer a wide variety of double wing, single wing gates and gateways with the same fillings for all heights

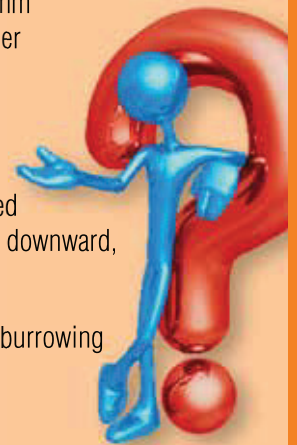

USE: industrial buildings, factories, schools, parks, fields...

Accessories for the installation of PILOFOR® panels

description	
	stainless steel panel fitting
	panel fitting pliers
	stainless steel braces to wall (2 pcs in package)
	PVC clamp for anchoring panels to square posts including bolt head covers green, black, gray
	PVC clamp for panels PILOFOR® CLASSIC to the gate or gateway frame
	stainless steel clamp for panels PILOFOR® CLASSIC to the gate or gateway frame
	hook bolt with nut
	galvanized security bolt with breaking off head for anchoring the clamp, bolt length 42 mm, 52 mm
	galvanized M6 bolt bolt length 40 mm

